




The B.O.S.S.[®] Brinell Optical Scanning System

is an automatic scanning system for the measurement of Brinell Impressions. It is designed to make your testing program faster and more accurate. It also improves quality control management by saving each measurement in an included statistical program.

Minimize Errors

Measurements are Quick and Easy

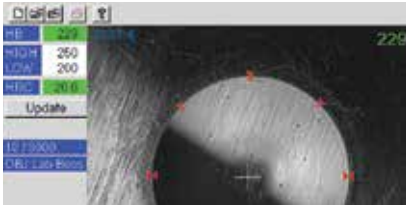


Locate the scan head over the impression and press the button. Diameter and Brinell hardness are displayed instantly.

Increased Accuracy



The B.O.S.S. easily measures with 0.01 mm resolution on most normally prepared surfaces.

Reduce Operator Influence on Results

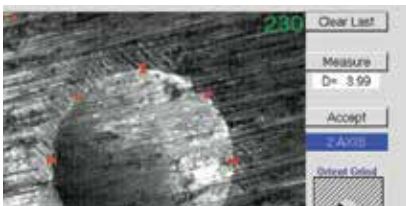

The BOSS gives consistent measurements not affected by operator interpretation.

Reduce Operator Fatigue



The B.O.S.S. prevents the chance of back ache caused from bending over a manual scope all day.

Reduce Operator Influence on Results

It is well known that measuring Brinell impressions can result in measurement errors of 0.1 mm between operators—the range is even greater between labs. This error can take up your entire tolerance specification. The B.O.S.S. will virtually eliminate operator influence on test results. Gage R&R evaluations show dramatically improved repeatability. With the B.O.S.S. your test results won't change with every shift change.



Measure & Record

Accurate, Consistent HB Hardness Measurement



Modular Architecture:

Thanks to its Modular Architecture, the B.O.S.S. may be used on most any desktop, laptop, or tablet PC. The B.O.S.S. can also be incorporated into automated test systems.

Intuitive Software:

The B.O.S.S. software allows easy navigation for functions such as quick setup of measurement conditions, tolerance and scale conversion settings, plus easy file management.

	GH	250
	OW	200
	C	21.2
Update		
	/ 3000	
	J-Lab Boss	

	File	View	Setup	Data	Help
	File	View	Setup	Data	Help
	C:\Mt92vw\test3.csv				
	11	Jun 03 2004 12:09	179		
	12	Jun 03 2004 12:09	177		
	13	Jun 03 2004 12:09	175		
	14	Jun 03 2004 12:09	181		
	C:\Mt92vw\test3.csv				



Data Collection:

Every test is saved with a date and time stamp. SPC data displays trends to head off out-of-tolerance situations. Statistical Reports—including X-bar, R-charts, and histograms—are easily created. And up to 10 fields of part information can be saved with results.

Measure... Instantly!

The test sequence is very simple. Move the scan head to center the impression on the screen, then press the button on the the scan head. In a fraction of a second, the B.O.S.S. captures an image

of the impression. Using the image to accurately measure the diameter, the system displays the resulting Brinell value, the diameter measurement, and the identified edges at 8 positions.



Expand Your System

The B.O.S.S System: Simple, Fast, and Powerful

The B.O.S.S. system can be added to any Brinell hardness tester; even our Newage Pin Brinell product. The system is comprised of a precision optical scan head, connected via a USB cable to a personal computer with the B.O.S.S. software installed. The software is used to select the primary hardness scale you are testing to. In addition, you have provisions to perform automatic hardness scale conversion.



Inch/millimeter Manual Measurement

The inch/millimeter manual measurement function allows the B.O.S.S. to be used to measure other visually discernable aspects such as etched total case depth layers.



Image Save Function

The Image Save feature allows you to save your image as a .bmp file. The operator can capture and name the image, and a .bmp extension is automatically added to the file name. Once saved, the image may be viewed, printed, or included in reports.



Pin Brinell Option

Use the BOSS system with your Pin Brinell hardware. By setting pin type, the BOSS software will automatically calculate the correct BHN number.

Easily Set Tolerances

You may set tolerances for your test to provide warnings and indications on individual test results. Tolerance settings include low tolerance limit, low tolerance warning, high tolerance limit, and high tolerance warning. Tolerance and warning values can be entered that will cause test results to be color-coordinated according to tolerance status. You can even configure the system to initiate an audible signal for out-of-tolerance results.



Ordering

Lab B.O.S.S. Systems

OS-100WX Desktop-based System with monitor and USB-style scan head.

OS-100WX-LS Desktop-based System with monitor and “small nose” USB-style scan head.

Lap B.O.S.S. Systems

OS-300W Laptop-based System with USB-style scan head.

OS-300W-LS Laptop-based System with “small nose” USB-style scan head.

Tablet B.O.S.S. Systems

OS-300WT Tablet-based System with USB-style scan head.

OS-300WT-LS Tablet-based System with “small nose” USB-style scan head.

USB B.O.S.S. System Only

OS-300WC USB-style B.O.S.S. System without computer. (customer must supply compatible PC)

B.O.S.S. Software Modules

MS-253W Advanced Statistical Software for all B.O.S.S. Systems.

MS-273 Image Save Software for all B.O.S.S. Systems.

MS-270W Inch/Millimeter Scale Software for all B.O.S.S. Systems.

OS-275 Pin Brinell Measurement Software for all “small nose” B.O.S.S. Systems.

B.O.S.S. Software Upgrades

C61011041 Upgrade of older* Windows versions to Windows 7. (With customer-supplied PC.)

C61011047 Upgrade of older* Windows versions to Windows 7, with new desktop CPU.

*Windows 98 or newer. For DOS and Windows 95 units, call for upgrade pricing.

 All systems conform to relevant EU standards and are CE marked.

B.O.S.S. Scan Heads Only

OS-300WE B.O.S.S. Scan Head only—USB.

OS-100WE B.O.S.S. Scan Head only—Mutech Card Systems.

OS-100WEP B.O.S.S. Scan Head only—Picolo Card Systems.

Options and Accessories

OS-013 Scan Head Cable—armored 10' (Mutech).

OS-014 Scan Head Cable—armored 20' (Mutech).

OS-015 Scan Head Cable—armored 15' (Units upgraded to Picolo).

OS-041 Scan Head Cable—armored 15' (Picolo).

OS-016 Scan Head Cable—armored 20' (Picolo).

OS-019 Scan Head Cable—standard 15' (USB).

OS-035 Scan Head Cable—armored 15' (USB).

OS-101 “Snap-Tite” B.O.S.S. Scan Head Holder for wall or table mount.

OS-103 Scan Head Tether—Recoiling Balancer only.

OS-104 Scan Head Tether—Bench Clamp Mount.

OS-106 Scan Head Holding Retractable Tether System.

OS-108 Mobile Enclosure for Lab B.O.S.S. System.

HA-0204 Scan Head Holding Bracket.

HA-0158 B.O.S.S. Verification Block.

SA-0112 Cable Adapter, 9- to 15-pin—armored (Mutech).

SA-0212 Cable Adapter, 9- to 15-pin—vinyl (Mutech).

SA-0227 Standard Cable—USB Scan Head, 6'.

SA-0271 Armored Cable—USB Scan Head, 8'.

MT-210 USB Printer with Cable.

newage.info@ametek.com

Visit us on the web at hardnesstesters.com

Newage[®]
hardness testing

No part of this document may be reproduced or modified in any form or by any means, electronic or mechanical, without express written permission from Newage Testing Instruments Inc.

© 2013 AMETEK Incorporated

AMETEK[®]
TEST & CALIBRATION INSTRUMENTS