

DATA LOGGER WITH MEASUREMENT OF CONDUCTIVITY

MAINTENANCE-FREE / AUTONOMOUS / DIAMETER 22 MM

DCX-22 AA CTD

DCX-22 (SG/VG) CTD

The CTD versions of the DCX-22 range are autonomous battery-operated data collectors made of stainless steel. Requiring little maintenance, they record the water level (pressure), temperature and conductivity over long periods. CTD stands for Conductivity, Temperature and Depth.

This data sheet specifies the additional conductivity measurement function which distinguishes the CTD version from the standard DCX-22 product line. The pressure and temperature specifications are set out in detail in the data sheets for the DCX-22 AA and DCX-22 (SG/VG).

Conductivity is increasingly being monitored in conjunction with depth measurements, in which changes in water quality and depth are required to be detected simultaneously. Thus it is possible to detect contamination caused by salt water infiltration, waterborne particles or general pollutants when measuring groundwater levels.

KELLER's Logger 5.1 programming and readout software is used to select a conductivity range (0...0.2 mS/cm, 0...2 mS/cm, 0...20 mS/cm or 0...200 mS/cm) and set the temperature coefficient for the medium. This process produces compensated conductivity measured values standardised at 25°C.

DCX-22 AA CTD

The DCX-22 AA CTD data collector records groundwater levels using the AA (absolute-absolute) measurement method, whereby fluctuations in atmospheric pressure are measured and compensated for by the watertight atmospheric pressure sensor with its stainless steel diaphragm. The advantage of this measurement method is that no humidity-sensitive capillary tube is required. As well, it is not required that the DCX-22 AA CTD be removed from the immersion tube in order to extract the data.

DCX-22 CTD

In the DCX-22 CTD, the sensor, electronics and battery are contained within the same housing. The data collector needs to be withdrawn from the immersion tube in order to extract the data. The DCX-22 CTD uses an absolute pressure sensor. In shallow water, where the impact of atmospheric pressure fluctuations also needs to be taken into account, a second DCX, acting as a barometer, is placed at the surface to record changes in atmospheric pressure. The pressure difference or, as appropriate, the water level is then calculated in the PC by subtracting both measured values.

DCX-22 (SG/VG) CTD

The DCX-22 SG/VG CTD versions have a cable outlet, negating the need to withdraw the instrument from the immersion tube in order to read out the data. A locking disc is used to secure the interface connector at the surface. In the VG version (reference pressure measurement), the reference equalisation capillary tube in the cable is inserted into the upper housing (read-out connector), where the reference opening protected by a Gore-Tex® diaphragm is located.




DCX-22 AA CTD



DCX-22 SG CTD
DCX-22 VG CTD



DCX-22 CTD

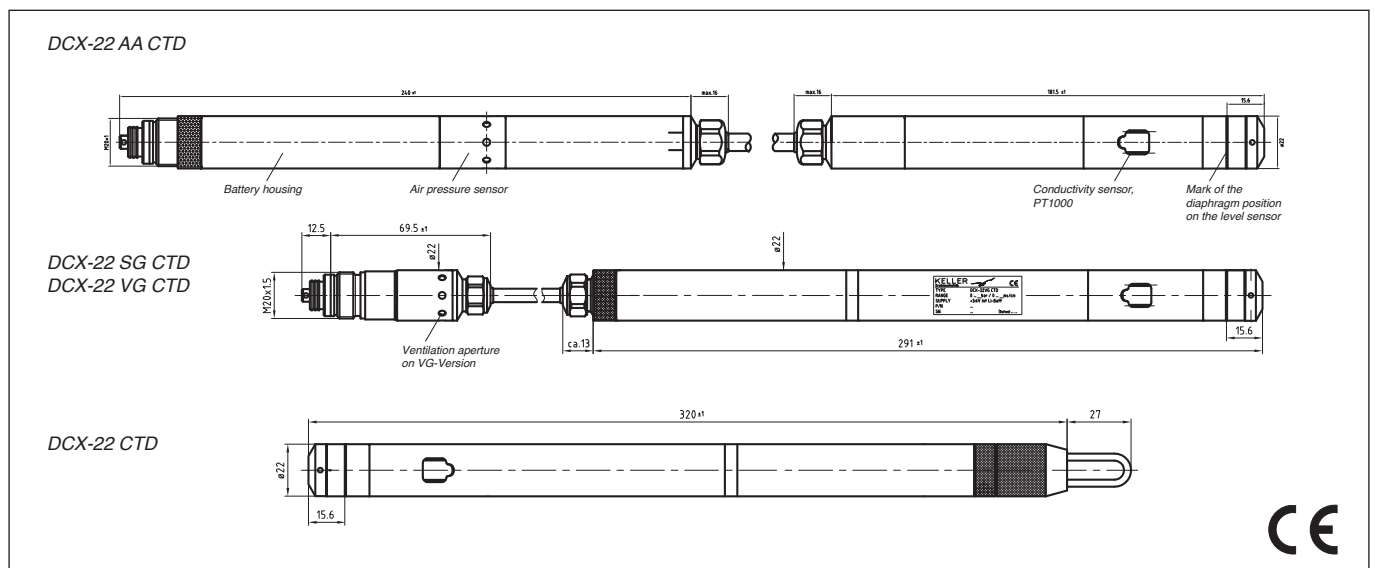

Subject to modifications

05/2014

KELLER AG für Druckmesstechnik
KELLER Ges. für Druckmesstechnik mbH

St. Gallerstrasse 119
Schwarzwaldstrasse 17

CH-8404 Winterthur
D-79798 Jestetten

Tel. +41 (0)52 - 235 25 25
Tel. +49 (0)7745 - 9214 - 0

Fax +41 (0)52 - 235 25 00
Fax +49 (0)7745 - 9214 - 60



KELLER

SPECIFICATIONS

Data Logger	114'000 measured values based on a storage interval ≤ 15 s, otherwise 56'000 (with time always specified), selected from immersion probe pressure, barometric pressure, associated temperatures, difference between the two pressures, conductivity, temperature-compensated conductivity (@25 °C), temperature of the conductivity sensor
Power Supply	Lithium battery 3,6 V (type AA)
Battery Life	8 years based on 1 measurement per hour (external influences may reduce service life)
Shortest Measurement Rate	1x per second
Output	RS 485 digital
Electrical Connector	Fischer DEE 103A054
Housing Material	Stainless steel 316L (DIN 1.4435), O-ring: Viton®
Cable Material	Polyethylene (PE)
Conductivity Sensor Material	Housing: polyether ether ketone (PEEK), measurement electrodes: platinum
Standard System Lengths	As per the data sheet for the DCX-22 AA, DCX-22 SG and DCX-22 VG
Measurement/Pressure Ranges	As per the data sheet for the DCX-22 AA and DCX-22 (SG/VG)
Storage/Operating Temperature Range	-20...+80°C
Pressure Sensors	
Accuracy ¹⁾	$\pm 0,02$ %FS max.
Resolution	$\leq 0,0025$ %FS
Compensated Temperature Range	-10...+40 °C
Total Error Band (-10...+40°C) ²⁾	$\pm 0,05$ %FS typically / $\pm 0,1$ %FS max. (optional $\pm 0,05\%$ FS max.)
Longterm Stability	± 1 mbar max.
Conductivity sensor	
Measurement Ranges	0...200 mS/cm
Measurement Range Selection	Choice of 4 ranges: 0...0.2 mS/cm, 0...2 mS/cm, 0...20 mS/cm or 0...200 mS/cm ³⁾
Resolution	$\leq 0,01\%$ max. of the selected range
Accuracy	± 1 % max. of the selected range
Measurement Method	6-electrode conductivity measurement cell
Temperature sensors	
PT 1000 (in the conductivity sensor)	Measurement range -10...+60 °C, accuracy 0,1 °C, resolution 0,01 °C
TOB Temperature ⁴⁾ (immersion probe/barometer)	Measurement range -10...+40 °C, typical accuracy $\pm 0,5^\circ\text{C}$

¹⁾ Linearity (BFSL), hysteresis and repeatability

²⁾ Accuracy and temperature errors

³⁾ mS/cm = milliSiemens per centimeter

⁴⁾ Temperature information for the measuring bridge of the pressure sensor (TOB: top of bridge)

LOGGER 5.1

The Logger 5.1 software can be used to configure and read out data from KELLER autonomous data loggers. The software helps the user take measurements in the field, prepare the data and forward it on to partners or end customers. Measurement data can be displayed graphically, exported, adjusted to compensate for atmospheric pressure or converted into other units. The online function shows the current values for the device.

The software comes with the interface converter or can alternatively be downloaded for free from www.keller-druck.com.

It requires a Windows operating system (WinXP or higher).

